## FRONT

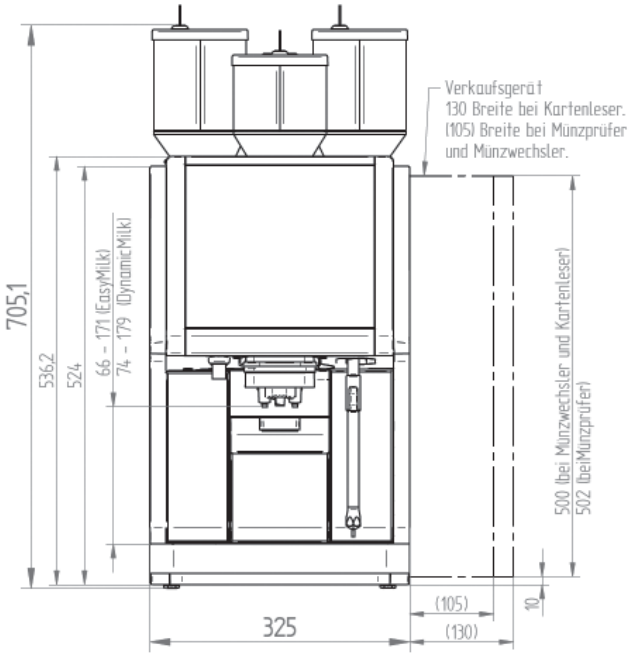


## TOP

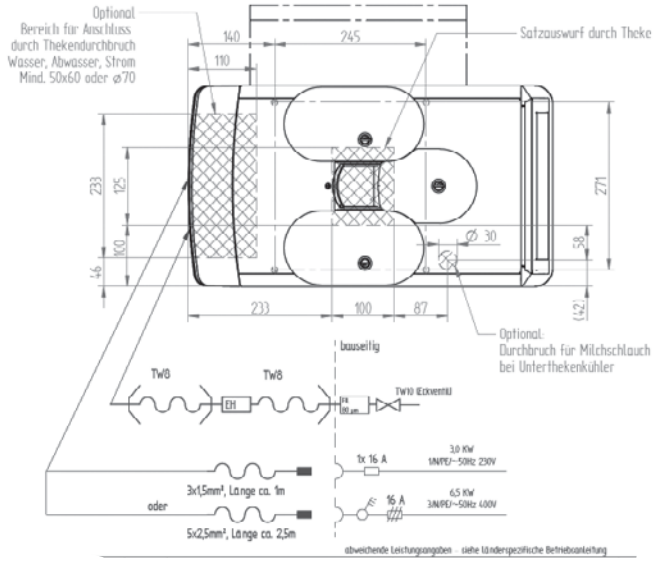


## SIDE

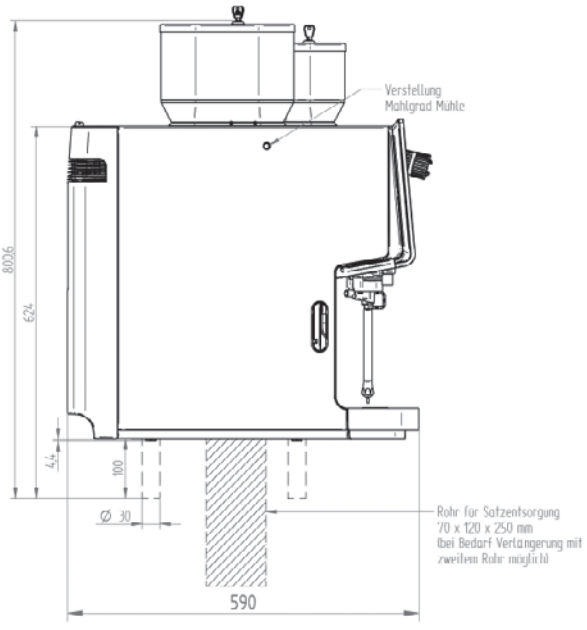


## VISUAL

## SPECIFICATIONS

| | |
|---|---|
| Nominal power rating | 2.75 - 3.25 kW / 5.9 - 7.1 kW |
| Energy loss / day (DIN 18873-2) | 1.73 kWh |
| Recommended daily output* | Up to 400 cups |
| Max. hourly output** | Up to 190 cups |
| Coffee bean hopper(s) | 1100 g (Center 550g) |
| Choc or topping container | 1200 g |
| Mains power connection | 230 V, 15amp, Single Phase (3 Phase power optional) |
| Water connection | 3/8" Hose. Min 0.2 MPa @ 2L / m, Max 0.6 MPa |
| Dimensions (width / height / depth) | 325mm / 706mm / 590 mm |
| Empty weight, depending on fittings | Approx. 37 kg |
| Continuous sound pressure level (LpA)*** | < 70 dB (A) |

* Based on the relevant service concept. These average values are for your information only. – Let our trained WMF employees put together a coffee machine solution that is designed to meet your needs. ** Depending on cup size, quality settings and flow.
*** The A-rated sound pressure level Lpa (slow) and Lpa (impulse) at the workplace of the staff using the machine is less than 70 dB (A) in every mode. From 5° dKH (carbonate hardness), a WMF water filter must be used. All technical changes, typographical mistakes and errors reserved for the entire contents.